

Datasheet

Air Base Extension

Part No: 100114



About the product

The Loxone Air Base Extension is used to extend the Miniserver, and allows the integration of various devices that are equipped with the Loxone Air wireless technology.


Technical Data

Power supply	9 ... 28VDC
Power consumption	typ. 0.15W, max. 0.15W
Interfaces	<p>Loxone Air: 868MHz (SRD Band Europe), 4 channels available max. Power 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 channels available max. Power 13.2mW</p> <p>SMA connector with 1.8 dBi stub-antenna</p> <p>connection with up to 128 Air devices</p> <p>Loxone Link: connection with Miniserver</p>
Power loss at max. load	0.15W
Ambient temperature	-40 ... 70°C / -40 ... 158°F
Humidity	max. 95% r.H. (non condensing)

Connections

Wire cross-section	0.25 ... 0.8mm ² / AWG23 ... 18
Stripping length	5mm / 0.2"
Temperature resistance	-40 ... 105°C / -40 ... 221°F
Orange / White	+24VDC / GND
Blue / White	Loxone Link

Connection Diagram

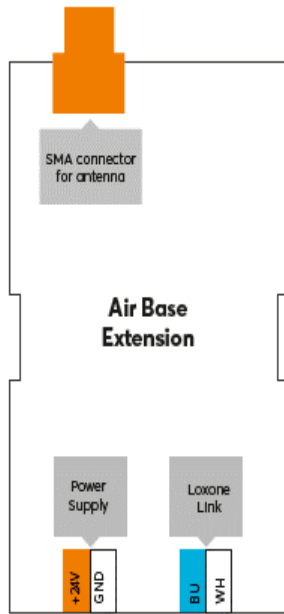


Product Characteristics

Mounting type	DIN rail according to EN50022, 35mm
Colours	Black: RAL 9005
Finish	Matte

Weight & Dimensions

Net weight	61g
Total weight	80g
Product dimensions	88x35.4x57mm / 3.46x1.39x2.24" (LxWxH), 2 division units

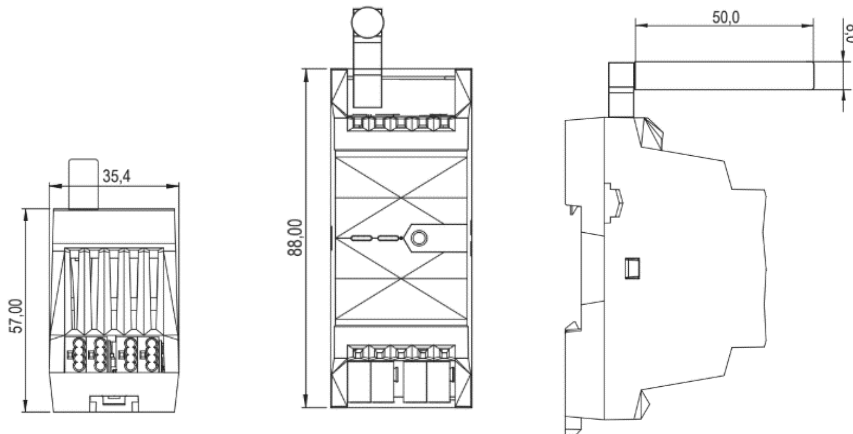

Pack size	121x38x62mm / 4.76x1.50x2.44" (LxWxH)
-----------	---------------------------------------

Certifications & Standards

Safety rating

IP20

UL 62368-1

CSA C22.2#62368-1

Certifications



Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by
Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom

Datenblatt

Air Base Extension

Art. Nr. 100114



Information zum Produkt

Die Loxone Air Base Extension dient zur Erweiterung des Miniservers, und ermöglicht das Einbinden zahlreicher Geräte, die mit der Loxone Air Funktechnologie ausgestattet sind.


Technische Daten

Spannungsversorgung	9 ... 28VDC
Leistungsaufnahme	typ. 0.15W, max. 0.15W
Schnittstellen	Loxone Air: 868MHz (SRD Band Europa), 4 Kanäle wählbar max. Sendeleistung 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 Kanäle wählbar max. Sendeleistung 13.2mW SMA Buchse mit 1,8 dBi Stabantenne Verbindung mit bis zu 128 Air Geräten Loxone Link: Verbindung mit Miniserver
Verlustleistung bei max. Last	0.15W
Umgebungstemperatur	-40 ... 70°C / -40 ... 158°F
Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)

Anschlüsse

Leiterquerschnitt	0,25 ... 0,8mm ² / AWG23 ... 18
Abisolierlänge	5mm / 0,2"
Temperaturbeständigkeit	-40 ... 105°C / -40 ... 221°F
Orange / Weiß	+24VDC / GND
Blau / Weiß	Loxone Link

Anschlussplan

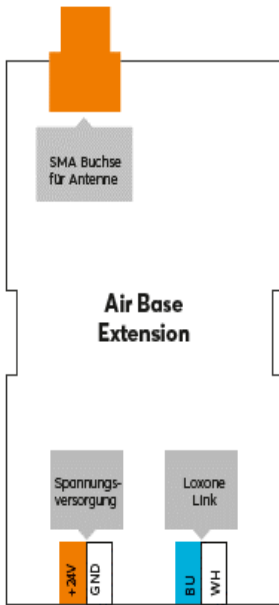


Produkteigenschaften

Montageart	Hutschiene nach EN50022, 35mm
Farbe	Schwarz: RAL 9005
Glanzgrad	Matt

Gewicht & Abmessungen

Nettogewicht	61g
Bruttogewicht	80g
Produktmaße	88x35,4x57mm / 3,46x1,39x2,24" (LxBxH), 2 Teilungseinheiten

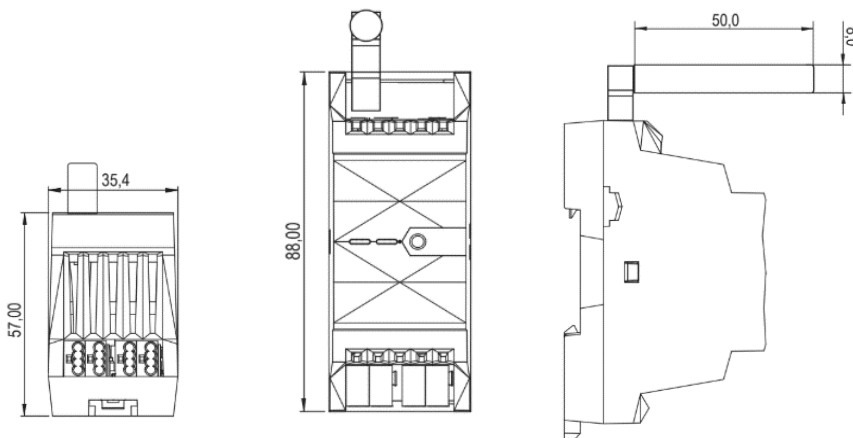

Packmaß	121x38x62mm / 4,76x1,50x2,44" (LxBxH)
---------	---------------------------------------

Zertifizierungen & Standards

Schutzart

IP20

UL 62368-1

CSA C22.2#62368-1

Zertifizierungen



Die Installation muss nach den einschlägigen Vorschriften durch eine Elektrofachkraft erfolgen.

Veröffentlicht von Loxone Electronics GmbH

Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK

The Forum
Station Road
Theale, RG7 4RA
United Kingdom