

## Datasheet

### Nano IO Air

Part No: 100153



### About the product

The Loxone Nano IO Air features 2 relay outputs and 6 digital inputs, for installation in an electrical box. The Touch for Nano is an optional plug-on keypad.

### Electrical Data


Power supply	110 ... 230VAC, 50/60Hz
Power consumption	max. 0.5W
Outputs	2 digital outputs (switching supply voltage) 5A at $\cos\phi=1$
Inputs	6 digital inputs 24VDC logic 0: 0 ... 5VDC undefined: 5 ... 7VDC logic 1: 7 ... 24VDC 24VDC output, max. 1W
Power loss at max. load	2.6W
Interfaces	Loxone Air: 868MHz (SRD Band Europe), 4 channels available max. Power 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 channels available max. Power 13.2mW internal antenna
Ambient temperature	0 ... 35°C / 32 ... 95°F
Humidity	max. 95% r.H. (non condensing)

### Connections

	Power supply & Relay outputs	Digital inputs
Wire cross-section	1 ... 2.5mm <sup>2</sup> / AWG17 ... 13	0.14 ... 1mm <sup>2</sup> / AWG26 ... 17
Stripping length	6mm / 0.24"	3.5mm / 0.14"
Temperature resistance	min. 70°C / 158°F	min. 70°C / 158°F
Max. wire length	-	3m

# LOXONE

## Connection Diagram

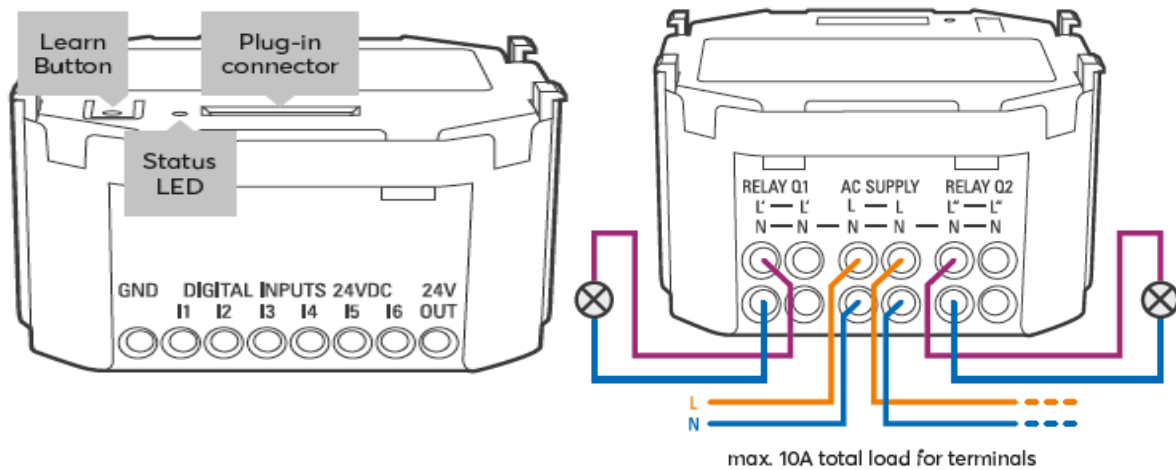


## Product Characteristics

Colours	Green RAL6018
Finish	Matte

## Weight & Dimensions

Net weight	56g
Total weight	79g
Product dimensions	53x52x29mm / 2.09x2.05x1.14" (LxWxH)

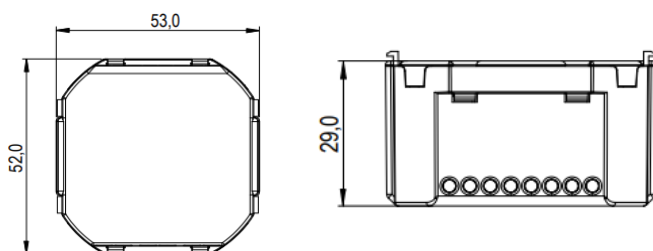

Pack size	88x95x33mm / 3.46x3.74x1.30" (LxWxH)
-----------	--------------------------------------

## Certifications & Standards

Safety rating

IP20

Certifications



Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

**Published by**  
**Loxone Electronics GmbH**

Smart Home 1  
4154 Kollerschlag  
Austria  
Tel: +43 7287 7070-0  
loxone.com

## Datenblatt

### Nano IO Air

Art. Nr. 100153



### Information zum Produkt

Die Loxone Nano IO Air verfügt über 2 Relaisausgänge und 6 Digitaleingänge, zur Installation in einer Unterputz oder Hohlwanddose. Optional ist das Tastenmodul Touch for Nano zum Aufstecken erhältlich.


### Elektrische Daten

Spannungsversorgung	110 ... 230VAC, 50/60Hz
Leistungsaufnahme	max. 0,5W
Ausgänge	2 digitale Ausgänge (schalten Versorgungsspannung) 5A bei $\cos\phi=1$
Eingänge	6 digitale Eingänge logisch 0: 0 ... 5VDC undefiniert: 5 ... 7VDC logisch 1: 7 ... 24VDC 24VDC Ausgang, max. 1W
Verlustleistung bei max. Last	2,6W
Schnittstellen	Loxone Air: 868MHz (SRD Band Europa), 4 Kanäle wählbar max. Sendeleistung 15,1mW e.r.p. 915MHz (ISM Band Region 2), 10 Kanäle wählbar max. Sendeleistung 13,2mW interne Antenne
Umgebungstemperatur	0 ... 35°C / 32 ... 95°F
Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)

### Anschlüsse

	Spannungsversorgung & Relay Ausgänge	Digitale Eingänge
Leiterquerschnitt	1 ... 2,5mm <sup>2</sup> / AWG17 ... 13	0,14 ... 1mm <sup>2</sup> / AWG26 ... 17
Abisolierlänge	6mm / 0,24"	3,5mm / 0,14"
Temperaturbeständigkeit	min. 70°C / 158°F	min. 70°C / 158°F
Max. Kabellänge	-	3m

## Anschlussplan

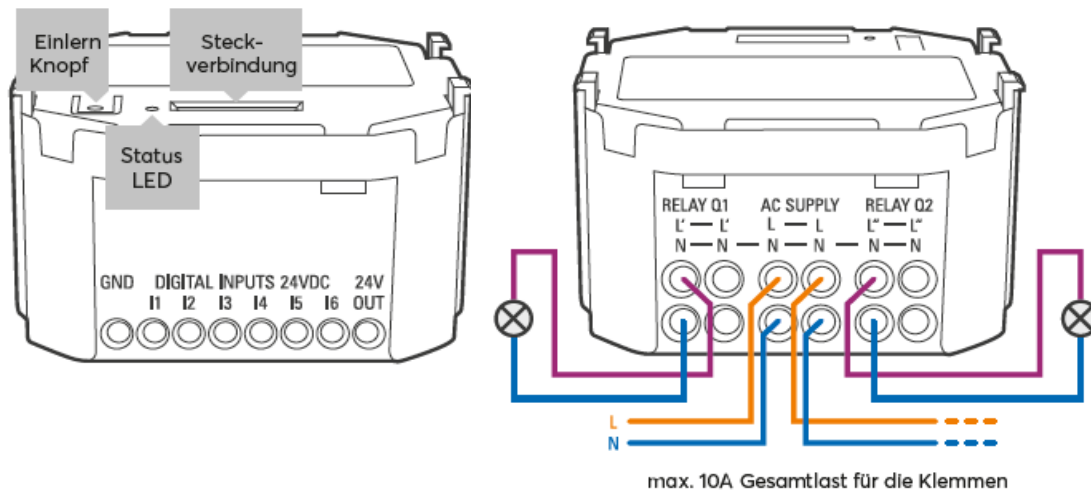


## Produkteigenschaften

Farbe	Grün RAL6018
Glanzgrad	Matt

## Gewicht & Abmessungen

Nettogewicht	56g
Bruttogewicht	79g
Produktmaße	53x52x29mm / 2,09x2,05x1,14" (LxBxH)

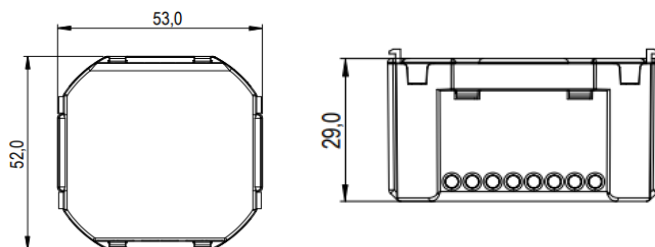

Packmaß	88x95x33mm / 3,46x3,74x1,30" (LxBxH)
---------	--------------------------------------

## Zertifizierungen & Standards

Schutzart

IP20

Zertifizierungen



Die Installation muss nach den einschlägigen Vorschriften durch eine Elektrofachkraft erfolgen.

**Veröffentlicht von**  
**Loxone Electronics GmbH**

Smart Home 1  
4154 Kollerschlag  
Austria  
Tel: +43 7287 7070-0  
loxone.com